





## THERMAL IMAGE STREAMING CAMERA

# FLIR FLIR Axxx™ Series



FLIR A400, A500, and A700 thermal cameras, when configured for Image Streaming, offer automation solution providers and industrial stakeholders the capabilities they need to accurately identify thermal issues across manufacturing processes. With multiple field-of-view choices, motorized focus control, and compressed radiometric image streaming, these automation cameras can tackle the most complex remote monitoring and temperature measurement objectives. Optimize Process Control and improve quality assurance through inline thermal inspections or identify abnormal conditions before a failure causes a production shutdown. The FLIR Axxx-Series can also provide early detection for faster responses to potential fires, helping minimize injuries and equipment damage. FLIR A400, A500, and A700 cameras offer unmatched power and flexibility in thermal monitoring for improved product quality, productivity, maintenance, and safety.

[www.flir.com/Axxx-Series-Image-Streaming](http://www.flir.com/Axxx-Series-Image-Streaming)

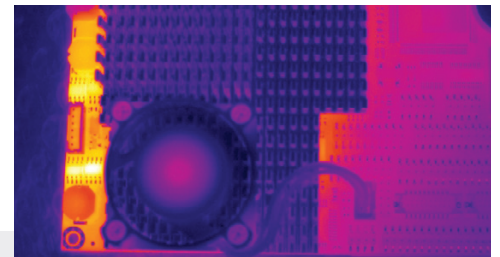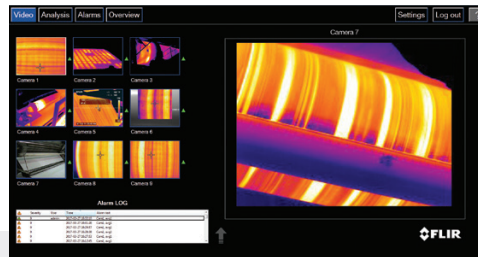

### FLEXIBILITY AND EASE OF INTEGRATION

Incorporate seamlessly into monitoring systems that meet a site's unique requirements

- GigE Vision® compliant – the industry standard
- GenICam™ compliant – another important industry standard
- Supports both GigE and RTSP data-streaming protocols\*
- Compatible with 3rd party SDK and application software support



\*Advanced †Optional ‡Model-dependent

### FLIR INNOVATIONS FOR SMARTER RESULTS

Transform process control, QA, and condition monitoring with leading-edge technology

- Temperature linear output simplifies use of temperature data in third-party software
- Compressed radiometric streaming\* cuts bandwidth by 90%, making it possible to connect cameras and share data via Wi-Fi†
- Reduced bandwidth also allows users to add cameras without expanding infrastructure, for an overall cost savings
- Simultaneously integrates with VMS and measurement applications using multi-image streaming\*

### WORLD-CLASS THERMAL IMAGING CAPABILITIES

Designed with the features to deliver consistent, accurate results

- Provides superior image quality with up to 640 × 480 (307,200) thermal pixel resolution†
- Offers a high measurement accuracy of ±2°C
- Improves temperature accuracy for objects near and far with precision motorized focus
- Increases contrast in even-temperature scenes and enhances edge detail in low light using FSX® (Flexible Scene Enhancement)\* technology

## SPECIFICATIONS

Image and Optical Data	Standard Configuration	Advanced Configuration
IR resolution	320 × 240 (A400), 464 × 348 (A500), or 640 × 480 (A700)	
Visual resolution*	1280 × 960	
Thermal resolution	<30 mK to <50 mK, lens dependent	
Lenses	14°, 24°, and 42°	
IR Camera Focus	One-shot contrast, motorized, manual	
Measurement		
Object temperatures	-20°C to 2000°C (-4°F to 3632°F), 3 ranges	
Accuracy	±2°C (±3.6°F) or ±2% of reading	
Video streaming, RTSP protocol		
Unicast	–	Yes
Multicast	–	Yes
Multiple image streams	–	Yes
Video stream 0		
Source	–	Visual, IR, MSX®
Contrast enhancement	–	FSX®, histogram equalization (IR only)
Overlay	–	With, without
Pixel format	–	YUV411
Encoding	–	H.264/MPEG4/MJPEG
Video stream 1		
Source	–	Visual, IR, MSX
Overlay	–	No
Pixel format	–	YUV411
Encoding	–	H.264/MPEG4/MJPEG
Radiometric streaming, RTSP		
Source	–	IR
Pixel format	–	MONO 16
Encoding	–	Compressed JPEG-LS; FLIR radiometric
Video/radiometric streaming, GVSP (GigE Vision) protocol		
Unicast		Yes
Multicast		Yes
Multiple image streams		No

Video stream 0	Standard Configuration	Advanced Configuration
Resolution	Visual, IR, MSX, 640 × 480 pixels	
Contrast enhancement	FSX (optional), histogram equalization (IR only)	
Overlay	With, without	
Pixel format	YUV411 or MONO 8	
Encoding	Uncompressed	

Radiometric streaming, GVSP		
Resolution	320 × 240 (A400), 464 × 348 (A500), or 640 × 480 (A700)	
Source	IR	
Pixel format	MONO 16	
Encoding	FLIR radiometric; temperature linear	Compressed JPEG-LS; FLIR radiometric; temperature linear

Ethernet	
Interface	Wired; Wi-Fi*
Connector types	M12 8-pin X-coded, female; RP-SMA, female
Ethernet type & standard	1000 Mbps, IEEE 802.3
Ethernet power	Power over Ethernet, PoE IEEE 802.3af class 3
Ethernet protocols	Include EtherNet/IP, Modbus TCP, and MQTT

Digital input/output	
Connector type	M12 Male 12-pin A-coded (shared with ext. power)
Digital input	2× opto-isolated, Vin (low) = 0-1.5 V, Vin (high) = 3-25 V
Digital output	3× opto-isolated, 0-48 V DC, max. 350 mA (derated to 200 mA at 60°C). Solid-state opto relay, 1× dedicated as fault output (NC)

Power system	
Connector type	M12 Male 12-pin A-coded (shared with Digital I/O)
Power consumption	7.5 W at 24 V DC typical; 7.8 W at 48 V DC typical; 8.1 W at 48 V PoE typical

Wi-Fi*	
Connector type	Female RP-SMA

The FLIR A-Series cameras are designed for configuration to your specific needs. To learn more about the Image Streaming Configuration options, please visit: [www.flir.com/axxx-series](http://www.flir.com/axxx-series)

\*Optional feature

**CORPORATE HEADQUARTERS**  
FLIR Systems, Inc.  
27700 SW Parkway Ave.  
Wilsonville, OR 97070  
USA  
PH: +1 866.477.3687

**LATIN AMERICA**  
FLIR Systems Brasil  
Av. Antonio Bardella, 320  
Sorocaba, SP 18085-852  
Brasil  
PH: +55 15 3238 8070

**NASHUA**  
FLIR Systems, Inc.  
9 Townsend West  
Nashua, NH 03063  
USA  
PH: +1 866.477.3687

**CANADA**  
FLIR Systems, Ltd.  
3430 South Service Road, Suite 103  
Burlington, ON L7N 3J5  
Canada  
PH: +1 800.613.0507

[www.flir.com](http://www.flir.com)  
NASDAQ: FLIR

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2020 FLIR Systems, Inc. All rights reserved. Updated: 11/17/2020

20-1448-INS-AUT-Axxx\_series IMAGE\_STREAMING\_US Letter



The World's Sixth Sense®