

P/N: T912182

Copyright

© 2023, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: T912182

Commit: 90064

Language:

Modified: 2023-02-01

Formatted: 2023-02-01

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



General description

The FLIR Si124 is a system for acoustic image measurements and signal analysis.

The FLIR Si124 uses 124 microphones to form a very precise acoustic image in the desired direction. This acoustic image is transposed in real-time on top of a digital camera picture, which allows the user to accurately see from which directions sound is arriving at the camera. Interesting sound sources can then be separated and saved for deeper analysis and problem classification including severity assessment, using the FLIR Acoustic Camera Viewer cloud service.

Two examples of problems, for which the FLIR Si124 works as a great tool, are the localization and classification of high-voltage partial discharges and the localization of pressurized air leaks in factories.

With partial discharges, useful information about the criticality of the observed problem is obtained by combining the accurate information about the location of the problem with deeper analysis of the signal. Analysis can be done using:

- FLIR Acoustic Camera Viewer (cloud service)
- FLIR Thermal Studio (desktop software).

Even the human ear can sometimes hear an air leak in a quiet environment, but in a typical industrial environment it is generally impossible to hear even bigger leaks due to loud background noise. The FLIR Si124 can very effectively filter out the industrial noise, allowing the user to locate quiet sounds even in noisy environments.

Features

- Cloud service: Upload the measurements to the FLIR Acoustic Camera Viewer for storage and analysis, like discharge classification and severity assessment.
- Leak localization and detection including estimated leak size and annual cost.
- Quickly create reports in FLIR Acoustic Camera Viewer or FLIR Thermal Studio.
- Environment: For outdoor and indoor industrial use.

Acoustic specifications	
Acoustic measurement	124 low-noise MEMS microphones, real-time sound visualization
Dynamic range, low limit	< -15 dB (frequency-dependent)
Dynamic range, high limit	> 120 dB (frequency-dependent)
Bandwidth	2 kHz to 65 kHz, adjustable range
MEMS Sampling Frequency	130 kHz
Distance	From 0.3 m (1.0 ft) up to 130 m (430 ft)
Discharge detection	Automatic detection 50 / 60 Hz

P/N: T912182

© 2023, FLIR Systems, Inc.

#T912182; r. 90064;

Acoustic specifications	
Discharge classification	<ul style="list-style-type: none"> Negative corona Positive and negative corona Floating discharge Surface or internal discharge <p>PRPD pattern provided in FLIR Acoustic Camera Viewer or FLIR Thermal Studio.</p>
Severity assessment	Automatic AI-based severity assessment including recommended actions in FLIR Acoustic Camera Viewer or FLIR Thermal Studio.
Leak localization and detection	Automatic leak recognition including estimated leak size and annual cost
Leak rate	<p>In typical industrial environment:</p> <ul style="list-style-type: none"> >0,032 l/min @ 3 bar from 3 m (9.8 ft) >0,05 l/min @ 3 bar from 10 m (32.8 ft) <p>Absolute minimum detection in quiet environment: 0.016 l/min @ 1.2 bar from 0.3 m (1.0 ft)</p>
User interface	
Display	<p>Size: 5 in. 800 × 480</p> <p>Color: 24 bit RGB</p> <p>Brightness: 1000 cd/m2 (adjustable)</p>
Input device	Resistive touchscreen
Power On indicator	LED (red)
Video image resolution	800 × 480
Camera FOV	62° × 49°
Video frame rate	25 fps
Acoustic image frame rate	30 fps
Zoom	2x Digital zoom
Languages	Czech, Danish, Dutch, English, Estonian, Finnish, French, German, Greek, Hungarian, Italian, Indonesian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Swedish, Thai, Traditional Chinese, Turkish, Vietnamese
Analysis and reporting	
Online	FLIR Acoustic Camera Viewer (cloud service)
Offline	FLIR Thermal Studio (desktop software)
Communication and data storage	
Data transfer	<ul style="list-style-type: none"> Wi-Fi 2.4 GHz and 5 GHz IEEE 802.11.b/g/n/ac wireless LAN USB memory stick
Camera software update	<ul style="list-style-type: none"> Automatic over Wi-Fi USB via computer
Still images	Yes
Video recording	Yes, up to 5 minutes.
Storage, internal	32 GB / 1000 snapshots (typical) SD card
Storage, external	8 GB / 500 snapshots (typical) USB mass storage, provided with device

P/N: T912182

© 2023, FLIR Systems, Inc.

#T912182; r. 90064;

Power supply	
Camera power input	Nominal input voltage 12 V Max input: 15 V 2.5 A
Battery	Li-Ion rechargeable battery pack (RRC 2040): 10.8 V, 3.35 Ah, 36.2 Wh Usage: Up to 2.5 h (depends on ambient conditions) Charge time: 2 h Max output: 12.6 V, 4 A
Battery charger	Input: 19-26 VDC, 2.8 A Max output: 17.4 VDC, 4.8 A
Internal battery (only for camera backup use)	Li-Ion 6 Wh
Environmental data	
Operating temperature range	−10 to 50°C (14 to 122°F)
Storage temperature range	−20 to 70°C (−4 to 158°F)
Relative humidity	Recommended 0 to 90%
EMC	<ul style="list-style-type: none"> FCC 47 CFR Part 15 Subpart B Class A EN 301 489-1 EMC for radio equipment EN 301 489-17 ICES 003 Issue 7 Class A
Radio	<ul style="list-style-type: none"> EN 300 328 v2.1.1 EN 300 893 v2.1.1 FCC Part 15 C / E Raspberry Pi RPI3P-MODBP FCC ID: 2ABCB-RPI3BP ICED: 20953-RPI3P
Protection class	IP51
Declaration of conformity	See: https://support.flir.com/resources/DoC
Physical data	
Camera size	315 × 170 × 160 mm (12.4 × 6.7 × 6.3 in)
Camera weight	0.98 kg (2.16 lb)
Battery size	85 × 59 × 22 mm (3.34 × 2.31 × 0.86 in)
Battery weight	0.17 kg (0.37 lb)
Total weight (camera + battery)	1.23 kg (2.71 lb)
Warranty and service	
Warranty	http://www.flir.com/warranty/
Shipping information	
Packaging, type	Cardboard box
Packaging, contents	<ul style="list-style-type: none"> Camera Battery (2 ea) Battery charger Neck strap Hard transport case License card: FLIR Si-series Plugin for FLIR Thermal Studio, Perpetual license Printed documentation USB memory stick
Packaging, weight	6 kg (13 lb)
Packaging, size	490 × 365 × 190 mm (19.3 × 14.4 × 7.5 in)



FLIR Si124 (2022)

P/N: T912182

© 2023, FLIR Systems, Inc.

#T912182; r. 90064;

Shipping information	
EAN-13	7332558029664
UPC-12	845188026738
Country of origin	Finland

Supplies & accessories:

- T912185; Battery RRC 2040
- T912186; Battery charger incl. power supply

Safety Data Sheet

RRC Batteries

Revision status

Revision	Valid from	Changes	Author
A	25Apr2017	First released version	DF
B	27jun2017	Change emergency phone numbers	DF
C	24oct2018	Template updated	HB
D	01jan2019	Regulation updated	TN
E	01oct2019	Added new products	TN
F	07oct2019	Updated template & Hazardous components	TN
G	04feb2020	New products, hazardous components and regulations	TN
H	29jan2021	Updated product list	TN

Declaration of Conformance (DoC)

UN38.3 Test Summary

Dok-Typ: Formblatt

Dok-Nr.: FO_Q_068

Rev.: B



1. Product information / Battery physical Description

Model name: RRC2040
Product classification: Li-Ion rechargeable battery pack
Nominal voltage: 10.8V
Rated capacity: 3350mAh
Capacity: 36.2Wh
Weight of product: 170g

2. Manufacturer information

RRC power solutions GmbH
Technologiepark 1
D-66424 Homburg
Germany
Telephone +49 6841 9809-0
sales@rrc-ps.de
www.rrc-ps.de

3. Conformance information

The product in section 1 complies with

UN Manual of Tests and Criteria, Part III, Subsection 38.3: 2009, 6th Revision.

4. UN38.3 Test Summary

UN38.3 Test Lab:	AnTeK Certification Inc. 7F., No. 351, Yangguang St., Neihu District, Taipei City, Taiwan atc@atclab.com.tw Phone number: 02-87523779 E-Mail: atc@atclab.com.tw Website: http://www.atclab.com.tw/	
Test Report No:	TW2003011-001	
Date:	2020-may-25	
UN38.3 Tests <u>Performed and Successfully passed:</u>	T1. Altitude simulation	T5. External short circuit
	T2. Thermal Test	T6. Impact
	T3. Vibration	T7. Overcharge
	T4. Shock	T8. Forced Discharge
Edition of UN Manual of Tests and Criteria used:	ST/SG/AC.10/11/Rev.6/Amend.1	

38.3.3 (f): n/a

38.3.3 (g): n/a

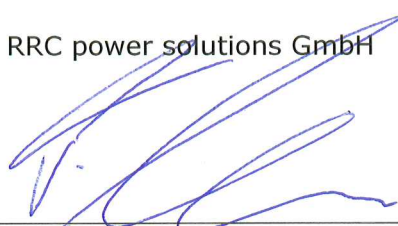
Ort und Datum der Ausstellung
[Place and date of issue]

Homburg, 28.July 2020

Unterzeichnet für und im Namen von:
[Signed for and on behalf of:]

RRC power solutions GmbH

Name [Name]
Funktion [Function]


Thomas Neumann
Regulatory Affairs Manager



Pony Testing International Group

报告编号 Report ID: MNIXE58T03464749 Page 1 of 2

扫描二维码
关注谱尼测试

锂电池或锂电池组 UN38.3 试验概要

Lithium Cell or Battery UN38.3 Test Summary

单位信息 Company information

委托单位 Applicant:		湖南华慧新能源股份有限公司 Hunan Huahui New Energy Co.,Ltd
生 产 商 Manufacturer	名称 Name	湖南华慧新能源股份有限公司 Hunan Huahui New Energy Co.,Ltd
	地址 Address	湖南省益阳市金秀路桐子坝巷 7 号 No.7, Tongziba Lane, Jinxiu Road, Yiyang, Hunan
	电话 Tel.	0769-81601938
	邮箱 E-mail	cqq@huahuienergy.com
	网址 Website	www.huahuienergy.com
测试单位 Test Lab.	名称 Name	谱尼测试集团深圳有限公司 Pony Testing Group Shenzhen Co., Ltd.
	地址 Address	深圳市宝安区福海街道和平社区骏丰中城智造创新园 A2 栋一层 1/F., Building A2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Road, Bao'an District, Shenzhen, Guangdong, China
	电话 Tel.	86-755-26050909
	邮箱 E-mail	cst@ponytest.com
	网址 Website	www.ponytest.com



样品信息 Sample information:

样品名称 Sample name	锂离子电池 Lithium ion battery	样品型号 Sample model	HTC1865
原始测试型号 Original tested type	/	产品参数 Sample parameter	2.4V 1300mAh
样品质量 Sample mass	38.2g	额定瓦时 Watt-hour rating	3.12Wh
电池或电池组类型 cell or battery type	锂离子电池芯 Lithium ion cell	物理形状 Physical description:	黄色圆柱形 Yellow Cylindrical
原报告编号 Original test report No.	MDIVQM0U25132721	测试报告日期 Date of test report	2016-09-23



微信扫一扫，使用小程序 小程序扫一扫，在线验证
No.: MNIXE58T03464749
Code: tsA220



北京实验室: (010)83055000 上海实验室: (021)64851999 青岛实验室: (0532)88706866 天津实验室: (022)27360730 苏州实验室: (0512)62997900 长春实验室: (0431)85150908 大连实验室: (0411)87336618 哈尔滨实验室: (0451)58627755 郑州实验室: (0371)69350670 新疆实验室: (0991)6684186 石家庄实验室: (0311)85376660 西安实验室: (029)89608785 呼和浩特实验室: (0471)3450025 杭州实验室: (0571)87219096 宁波实验室: (0574)87736499 武汉实验室: (027)83997127 合肥实验室: (0551)63843474 广州实验室: (020)89224310 厦门实验室: (0592)5568048 成都实验室: (028)87702708